

RK Direct Drive Winches


500-6000 lb Capacity

Standard Features:

- Direct drive fully enclosed gear reducer with helical-bevel gearing.
- Totally enclosed fan cooled electric motors with high starting torque to overcome initial inertia of pulling load.
- 230/460/3/60 Voltage
- Automatic electromagnetic brake activates in the event of power interruption to brake stop and hold load securely.
- Heavy duty welded steel frame and drum construction with bolt down provision.
- Winch is sandblasted, primed, and painted.

Optional Features:

- NEMA 1 and NEMA 4 Starter panels and control packages
- Longer or shorter drum lengths
- Explosion-proof motors
- Disengaging clutch
- Split drums for dual cables
- Rapid response brake control
- Rotary limit switch
- Grooved drums
- Custom designs available

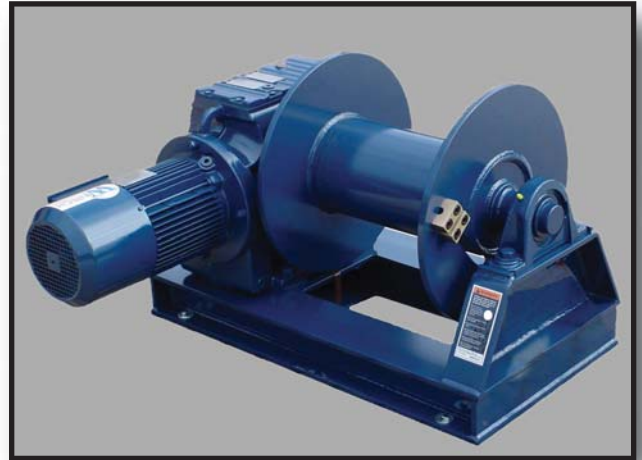


Model	Linepull (Lbs)				Linespeed (FPM) 2nd Layer	HP.	Cable Size (Inch)	Drum Capacity (Ft)	
	Starting		Running					2nd Layer	Full Drum
	1st Layer	4th Layer	1st Layer	4 Layer					
RK500-20	1260	960	550	420	22	1/3	1/4	84	300
RK500-50	1260	960	550	420	49	3/4	1/4	84	300
RK800-20	2150	1650	950	720	19	1/2	1/4	84	300
RK800-80	2150	1650	950	720	78	2	1/4	84	300
RK1000-20	2500	1900	1100	840	25	3/4	1/4	84	300
RK1000-50	2500	1900	1100	840	49	1 1/2	1/4	84	300
RK1000-150	2500	1900	1100	840	162	5	1/4	84	300
RK1500-30	3900	3100	1700	1340	32	1 1/2	3/8	124	446
RK1500-60	3700	2900	1600	1260	67	3	3/8	124	446
RK2000-20	6200	4700	2700	2043	20	1 1/2	3/8	124	446
RK2000-40	6200	4700	2700	2043	41	3	3/8	124	446
RK2000-75	5600	4200	2440	1840	75	5	3/8	124	446
RK3000-30	7350	5750	3200	2500	34	3	7/16	136	388
RK3000-80	7700	6000	3350	2600	81	5	7/16	136	388
RK4500-20	12400	9300	5400	4070	20	3	1/2	121	349
RK4500-50	11600	8800	5050	3820	53	7 1/2	1/2	121	349
RK6000-40	14700	11000	6400	4800	43	7 1/2	5/8	161	465
RK6000-75	16500	12500	7200	5450	75	15	5/8	161	465

Due to our policy of continuing development, all specifications are subject to change without notice. Users of these products are responsible for ensuring their suitability for the application in which they are being used.

Made in the USA



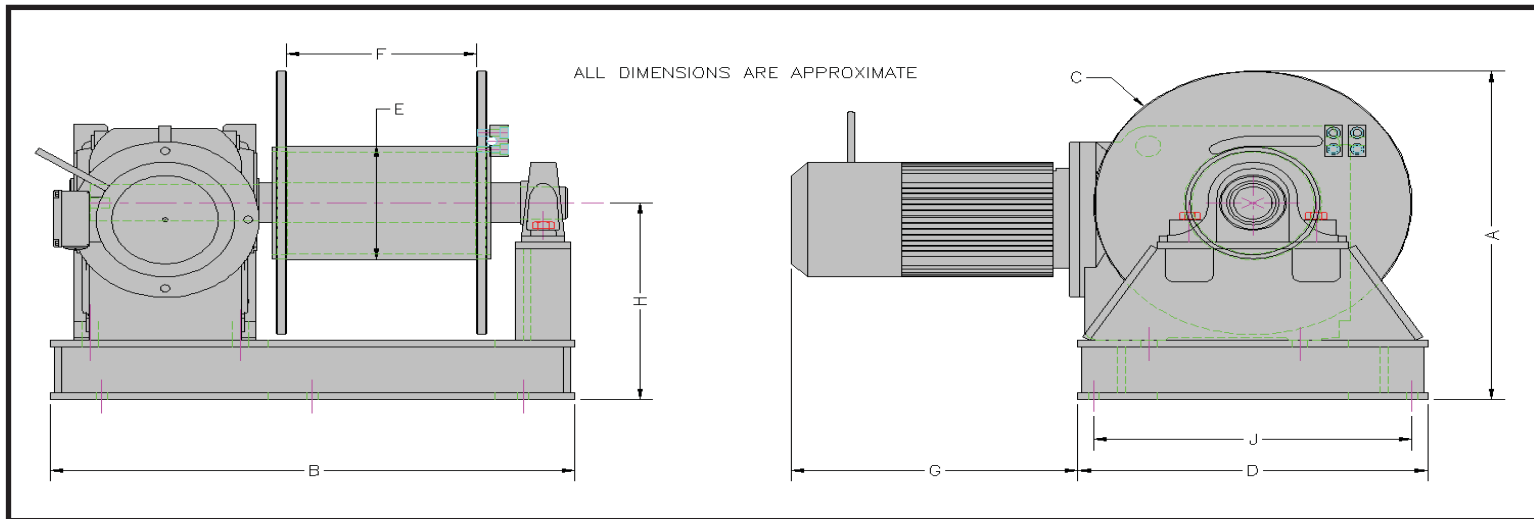

Model	Dimensions (Inches)									
	A	B	C	D	E	F	H	I	J	Weight (lbs)
RK500-20	10 1/2	19 3/4	8	11 3/4	4 1/2	8	6 1/2	2 1/2	10 1/4	130
RK500-50	10 1/2	19 3/4	8	11 3/4	4 1/2	8	6 1/2	2 1/2	10 1/4	137
RK800-20	10 1/2	19 3/4	8	11 3/4	4 1/2	8	6 1/2	2 1/2	10 1/4	137
RK800-80	10 1/2	19 3/4	8	11 3/4	4 1/2	8	6 1/2	3 3/4	10 1/4	149
RK1000-20	11 1/2	20 3/4	8	11 3/4	4 1/2	8	7 1/2	2 1/8	10 1/4	150
RK1000-50	11 1/2	20 3/4	8	11 3/4	4 1/2	8	7 1/2	3 1/2	10 1/4	164
RK1000-150	11 1/2	20 3/4	8	11 3/4	4 1/2	8	7 1/2	3 3/4	10 1/4	181
RK1500-30	15 1/8	24 3/4	12	16 1/2	6 7/8	12	9 1/8	2 3/4	14 3/4	234
RK1500-60	15 1/8	24 3/4	12	16 1/2	6 7/8	12	9 1/8	2 7/8	14 3/4	250
RK2000-20	16 3/8	26 1/4	12	16 1/2	6 7/8	12	10 3/8	2 1/8	14 3/4	303
RK2000-40	16 3/8	26 1/4	12	16 1/2	6 7/8	12	10 3/8	2 1/4	14 3/4	322
RK2000-75	16 3/8	26 1/4	12	16 1/2	6 7/8	12	10 3/8	2 1/4	14 3/4	322
RK3000-30	19 3/4	26 3/4	14	19 1/2	8 7/8	12	12 3/4	2 1/2	17 3/4	436
RK3000-80	19 3/4	26 3/4	14	19 1/2	8 7/8	12	12 3/4	3	17 3/4	471
RK4500-20	19 7/8	30 1/4	14	22 3/4	8 7/8	12	12 7/8	1 1/2	17 3/4	662
RK4500-50	19 7/8	30 1/4	14	22 3/4	8 7/8	12	12 7/8	1 1/2	17 3/4	675
RK6000-40	23 1/2	35 3/4	18	23 3/4	10 3/4	16	14 1/2	2 3/4	21 1/4	1061
RK6000-75	23 1/2	35 3/4	18	23 3/4	10 3/4	16	14 1/2	2 2/3	21 1/4	1140

Due to our policy of continuing development, all specifications are subject to change without notice. Users of these products are responsible for ensuring their suitability for the application in which they are being used.

Custom Configurations Available Upon Request!



RK3000 w/Clutch



RK7500 w/4 Roller Fairlead



Dual Drum RK-4000



Wintech International, LLC

5319 Shreveport-Blanchard Hwy.
Shreveport, LA 71107

P: 318.929.1242 • F: 318.929.1245

www.wintech-winch.com