EVERYTHING YOU NEED FROM THE



RIVER TIGHTEN® (RT-40)

Features & Specifications

- Next-generation deck winch technology to safely secure your tow
- Line speed 30% faster than Wintech DW40 for rapid facing and fleeting operations.
- Designed from the deck up for reliability and ease of maintenance
 - Reduced number of shafts and bearings compared to legacy designs
 - IP66 watertight sealed brake, no adjustments necessary
 - All shafts are removable from either side of the winch with hand tools
 - No cable wedge, standard U-bolt rope connection to drum
- Stainless steel dog handle stays stationary while dog is engaged
- Nylatron exit rollers protect costly synthetic rope from damage
- All rotating components inside winch side frames
- Powder coated marine grade aluminum guards
 - Custom logos and colors available at no charge
 - Motor protected under oversized top guard








RIVER TIGHTEN®

PULLS HARDER, HOLDS TIGHTER, SPOOLS FASTER.

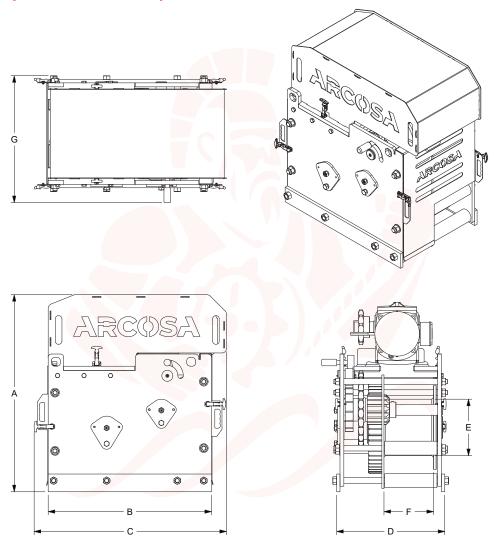

MODEL	HOLDING CAPACITY		LINE PULL @ FIRST LAYER	STALL PULL	LINE SPEED	WINCH LINE CAPACITY		
	@ FIRST LAYER					5/8"	3/4"	1-1/8"
RT-40	40 T (80,000 LBS)	70,000 LBS	11,500 LBS	44,275 LBS	26 FPM	287 FT	180 FT	100 FT

MODEL NO.	Α	В	С	D	Ξ	F	G
RT-40	44-5/8"	37"	43-9/16"	24-1/2"	12-13/16"	11-1/4"	28-3/4"

^{*}Fits existing Wintech DW40 deck brackets without any hot work



