

Description:

Wintech's four roller directional fairleads are designed to direct cables at angles up to 45 degrees from the load. Assembly configurations can be customized to suit your application.



Standard Features:


- Heavy duty steel rollers
- Lubricated bronze bearings
- Alloy steel shafts with keeper tabs
- Weld down or bolt down base
- Heavy duty fabricated steel frame

Optional Available:

- Stainless steel shafts and hardware
- Self lubricated high capacity synthetic bearings
- Nylatron synthetic roller material
- Custom configuration and additional rollers

Four Roller Directional Fairleads



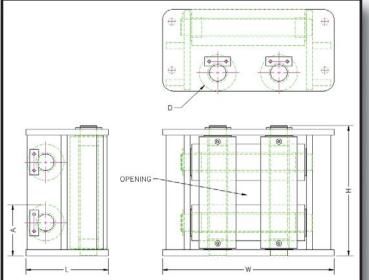

Wintech Model Number	Max Wire Size	Wire Breaking Strength	Opening	Dimensions (inches)					A
			Size (WxH)	Overall	Overall	Overall	Base to	Roller	Approx Weight (lbs)
				Width	Height	Depth	Opening	Diameter	
			(in)	'W'	Ή'	'L'	'A'	'D'	
F4-25	1/2"	26,000 lbs	3 X 3	15	10	5.5	3.25	2.5	90
F4-40	3/4"	58,800 lbs	4 X 4	18	15	9	5.125	4	315
F4-60	1 1/4"	159,800 lbs	4 X 4	28	21.5	13.5	7.5	6	840
F4-80	1 3/4"	306,000 lbs	8 X 8	32	27	17	9.375	8	1,800
F4-100	2 1/4"	494,000 lbs	10 X 6	40	35	21	15.5	10	3,400

