

## Vertical Deflector Fairleads

## **Description:**

Wintech vertical deflector sheave fairleads are designed to assist in directing wire rope from the winch to the load. Standard fairleads have heavy duty construction and are designed for long life in severe duty applications. *Custom configurations are available to suit unique rigging challenges*.

## **Standard Features:**


- Cast or steel sheave with precision machined groove
- Deep groove sealed ball bearings
- Alloy steel shaft
- Heavy duty fabricated steel frame
- · Bolt or weld down base

## **Options Available:**

- Greasable bronze bearings
- Stainless steel shaft and hardware
- Nylatron synthetic sheave
- Customized sheave configurations





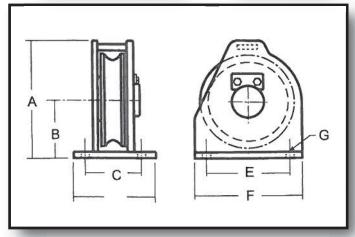

Model Number	Sheave Diameter	Wire Rope Size	Safe Working Load (lbs)	Dimensions (inches)					
				A	В	С	Е	F	G
FV-1	6"	1/2"	4,000	7	3.5	3.75	5.25	6.5	0.5
FV-2	8"	5/8"	8,000	9.25	4.75	4.5	7.5	9	0.63
FV-3	10"	3/4"	12,000	11.5	5.75	5.5	9.5	11	0.75
FV-4	14"	7/8"	20,000	15.5	8	6	13	15	0.88
FV-5	16"	1"	32,000	18.5	9.5	7.5	15	18	1
FV-6	20"	1 1/8"	40,000	23	11.5	8.5	19	23	1.125
FV-7	24"	1 1/4"	50,000	28	13.5	10	23	27	1.25

Due to our policy of continuing development, all specifications are subject to change without notice. Users of these products are responsible for ensuring their suitability for the application in which they are being used.

